


# DehuKing



## MODEL DU04T05CK126-1010-1 Staged Dehumidification Energy Saver

TOP

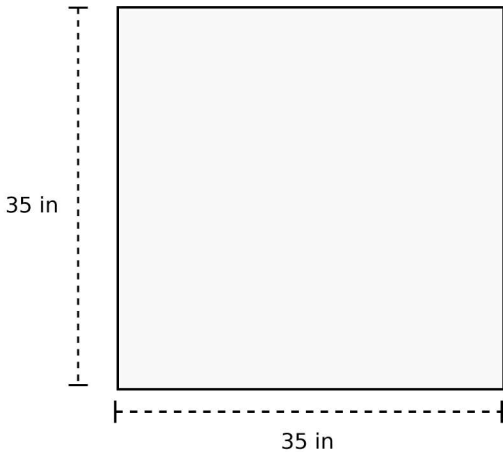

### SPECIFICATIONS:



- 4 ton dehumidifier
- Performance: 1030 pints @ 80F and 60% relative humidity
- 5.42 gallons per hour, 130 gallons per day
- 10.58 pints per KW
- Electrical: 208/230V, 60hz Single phase
- Minimum Circuit Ampacity: 25, Maximum Fuse Size 40 Amps
- R410a Refrigerant
- Two 24,000 BTU/HR compressors
- CFM: 2,000
- Dimensions: 35" wide, 35" long, 20-1/4" tall
- Weight (LBS): 311
- Decibels: 84

### ADDITIONAL FEATURES:

- Dual Dehumidistats stage process
- For suspending in Greenhouse, four easy access all thread mounts

FRONT SIDE EXPOSED

REAR SIDE EXPOSED

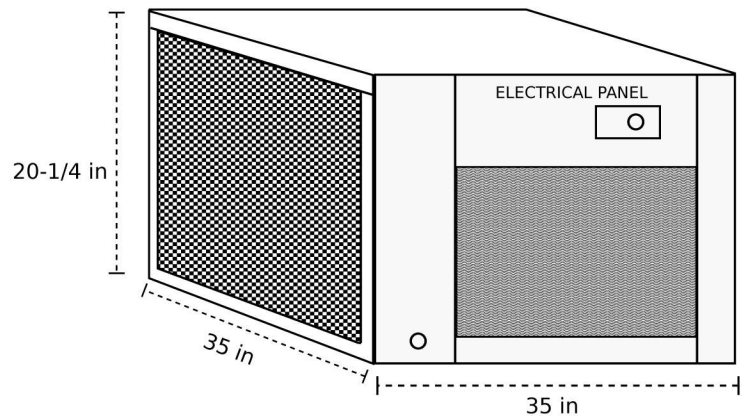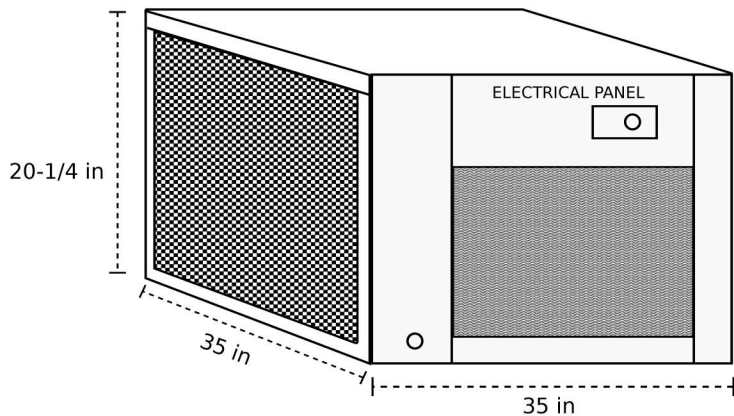

\*EACH OPPOSITE SIDE IDENTICAL

# DehuKing



## MODEL DU04T05CK126-1010-1 WIRING DIAGRAM

4 ton Dehumidifier  
208/230V Single Phase

