


DehuKing



MODEL DU10T14CK348-3


TOP

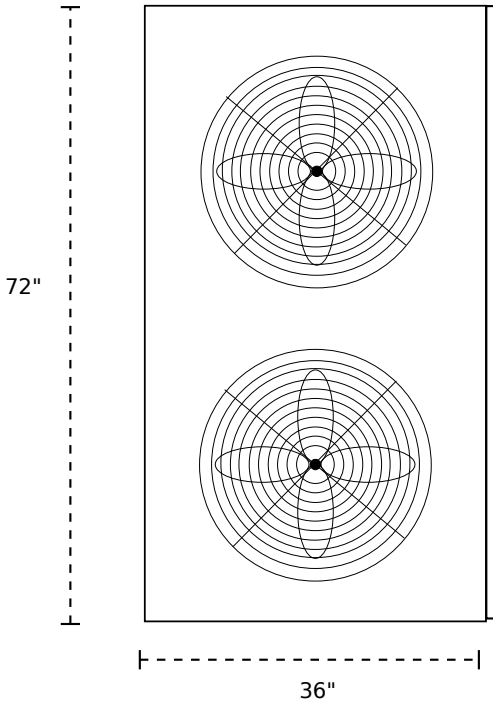


SPECIFICATIONS:

- 10 ton dehumidifier
- Performance: 13.96 gallons per hour @ 80F and 60% relative humidity
- 15 gallons per hour, 372 gallons per day
- 12.13 pints per KW
- Electrical: 208/230V, 60hz three phase
- Minimum Circuit Ampacity: 40, Maximum Fuse Size 56 Amps
- R410a Refrigerant
- Two 60,000 BTU/HR Copeland Scroll Compressors
- CFM: 7,200
- Dimensions: 72" wide, 36" long, 77" tall
- Weight (LBS): 1100; w/ closed crate 1620
- Decibels: 84

SIDE

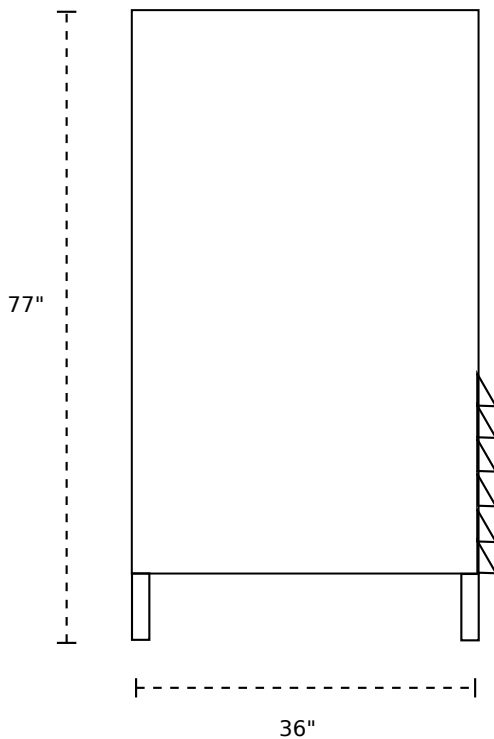

FRONT

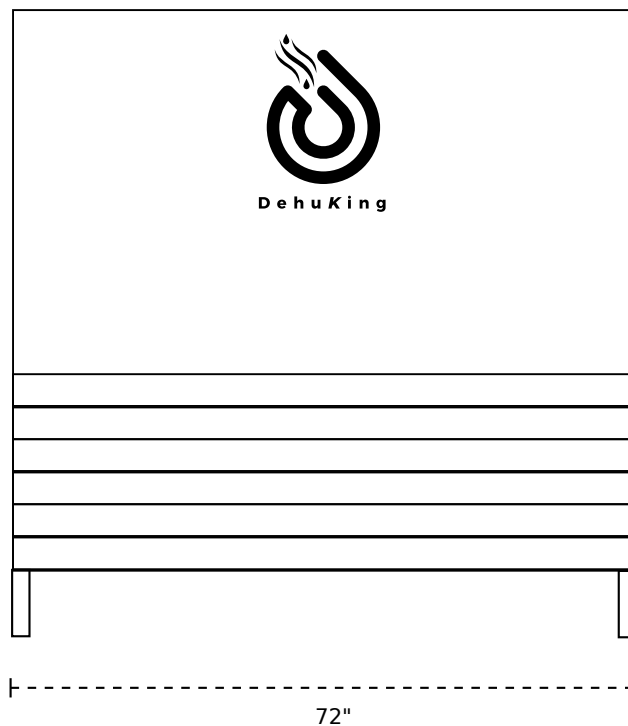

P.O. Box 1696 Bastrop, Texas 78602 Tel 512-303-1529

www.chillking.com