






## 20 TON FULL FUNCTION REMOTE DEHU MODEL RDU20T29CK696-3

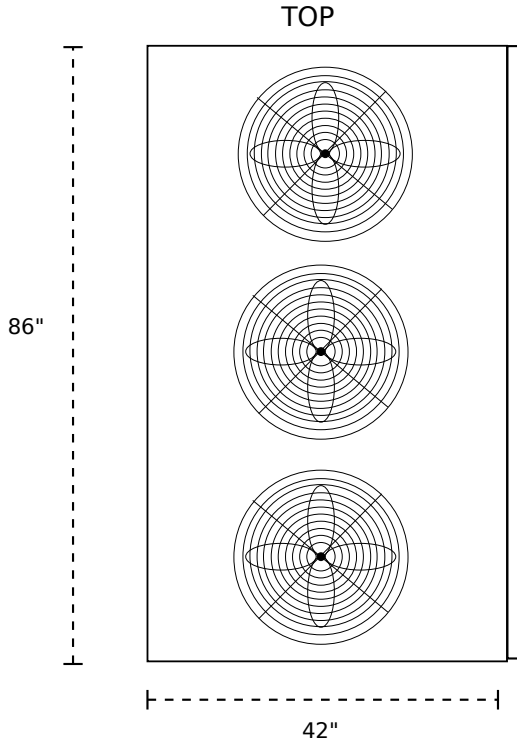

### SPECIFICATIONS:

- 20 ton dehumidifier
- Performance: 27.8 gallons per hour @ 80F and 60% relative humidity
- 29 gallons per hour, 696 gallons per day
- 12.63 pints per KW
- Electrical: 208/230V, 60hz three phase
- Minimum Circuit Ampacity: 55, Maximum Fuse Size 77 Amps
- Two Remote Condensers each at Minimum Circuit Ampacity: 46.4 Amps, Maximum Fuse Size 70 Amps
- R410a Refrigerant
- Two remote condensers, specs on next page
- Scroll compressor, specs on next page
- CFM: 6,000
- Dimensions:
  - Inside unit 86" wide, 42" long, 77" tall
  - Outside remote units (2) each 35-1/2" wide, 35-1/2" long, 38-1/4" tall
- Decibels: 84
- Weight (LBS): 1405

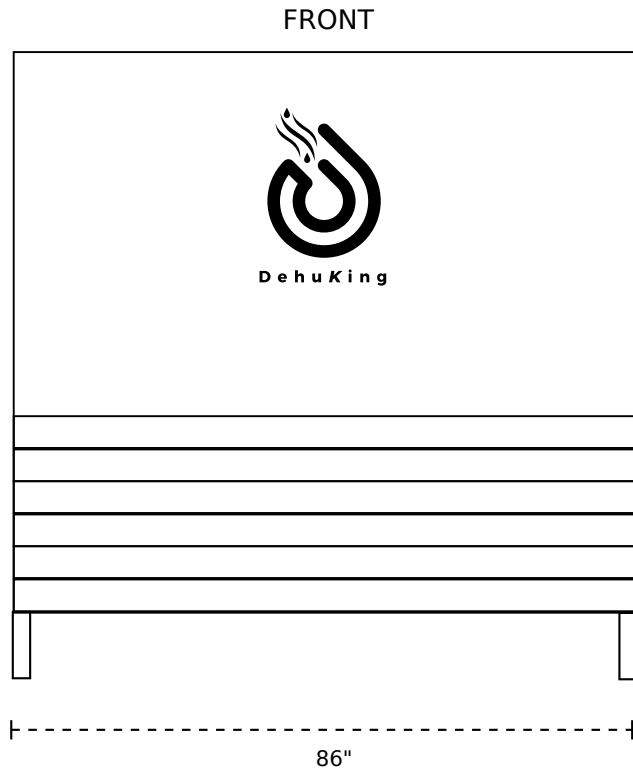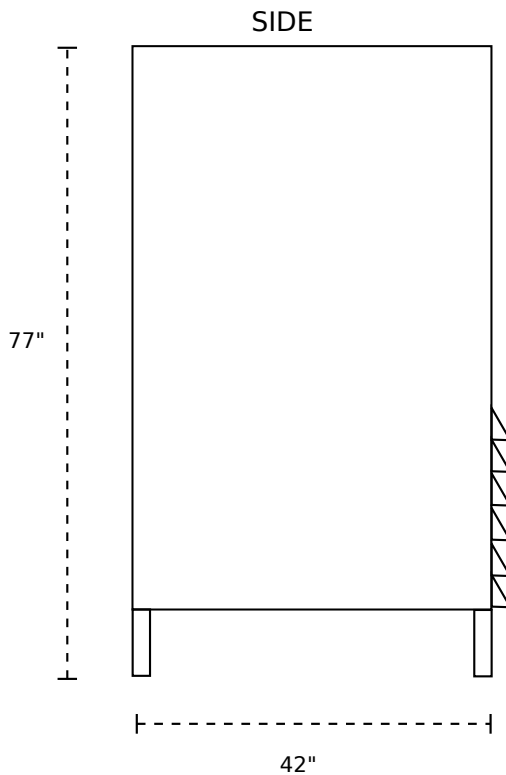




TOP

## 20 TON FULL FUNCTION DEHU

### MODEL RDU20T29CK696-3

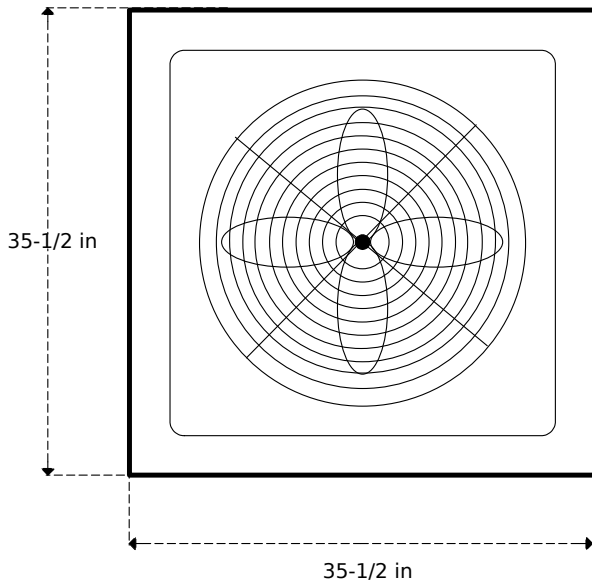

- Two remote condensers each:
- Electrical: 208/230v
- Minimum Circuit Ampacity: 46.4 Amps, Maximum Fuse Size 70 Amps
- Each with 120,000 BTU/HR Copeland scroll compressor
- Dimensions (each): 35-1/2" wide, 35-1/2" long, 38-1/4" tall
- Approximate shipping weight (LBS): 301 each
- Decibels: 72

FRONT

REAR

